


Dimensions	495 x 370 x 415 (h) mm
Weight	30 kg (66lb)
Voltage - Frequency	250 V - 50 Hz
Current Consumption	3,8 A
Compressor Power	1/2 HP
Power consumption (cooling)	580 W
Cooling Capacity at water temperature of 8°C *	800 W
Suggested for insulated tank, water temperature 8°C *	1400 l **
Suggested for not insulated tank , water temperature 8°C *	600 l **
Suggested for not insulated tank , water temperature 25°C *	2000 l ***
Minimum Water flow	3000 l/h - 4000l/h
Air Flow	570 m³/h
Maximum Exchanger's Pressure	1 bar (14,5 psi)
Ambient Temperature Range	5°C - 38°C (32°F-100°F)
Certification \ Protection Grade	CE \ IPX4
Gas Type and Quantity	r134a - 400 g

Reported value refers to the following conditions:
 * room temperature 30°C
 ** heating load less than 0,1 W/l
 *** heating load 0,2 W/l
 All data may be changed without notice by TECO

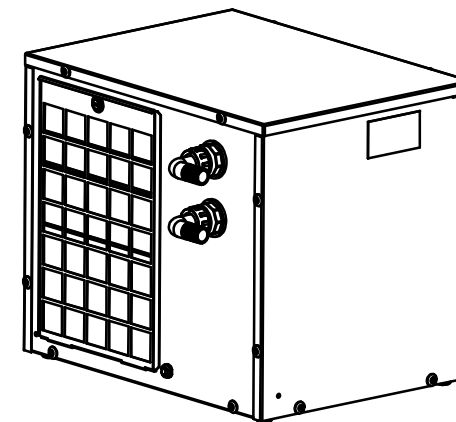

Material:	Drawing: TK2800 Technical Drawing	
Thickness:	File: TK2800_technical_drawing	
Finishing:	Your code:	Code: TK2800
Volume:	Tol.	Scale: 1: 8
Approved:	Date: 14/02/2017	
	Via A.Sansovino, 35	
	48124 RAVENNA - ITALY	
	Tel. +39 0544 408333 Fax 280084	
	http://www.tecoonline.com	
	Drawer: Giulia	